

Single phase UPS

1-Ph from 450 VA to 10 kVA



Applications

- Home Office
- Computers and peripherals
- Networks and servers
- Small data centres

Highlights

- User-friendly and Plug and Play
- Compact and noiseless
- Intuitive LCD display
- Rack/Tower convertible design
- Parallel redundant configuration



BORRI

GIOTTO

1-Ph from 450 to 2000 VA

Line-interactive UPS
for Home Office,
computers and peripherals




Features and benefits

- User-friendly UPS ensuring compact protection for a wide range of needs:
 - Best power protection for PC from 450 to 850 VA with one output receptacle (IEC 320-C13) and one Schuko.
 - Advanced power protection from 1000 to 2000 VA with four output receptacles (IEC 320-C13) and one Schuko for high performance PC and peripherals.
- Instantaneous battery back-up power and electrical interference protection.
- Plug and Play installation easy to set up also for first-time users.
- Compact and noise-free running to be placed anywhere at home or office.
- Energy efficient ensuring lowest impact on energy costs.
- Intuitive LCD display provides easy-to-read UPS status and power information.
- Audible alarm alerts upon utility power and UPS status change.
- Easy User-replaceable battery.
- AVR technology stabilizing output voltage to protect your electronics over a wide range of mains quality issues.
- Advanced battery management extending battery life.
- Internet Modem / LAN protection via RJ-11/45 plug.
- USB communication port providing UPS managements.
- Cold start for powering loads when mains are not available.
- Borri Power Guardian user-friendly UPS management software free downloadable at www.borri.it/download.



Autonomy time in minutes with internal battery

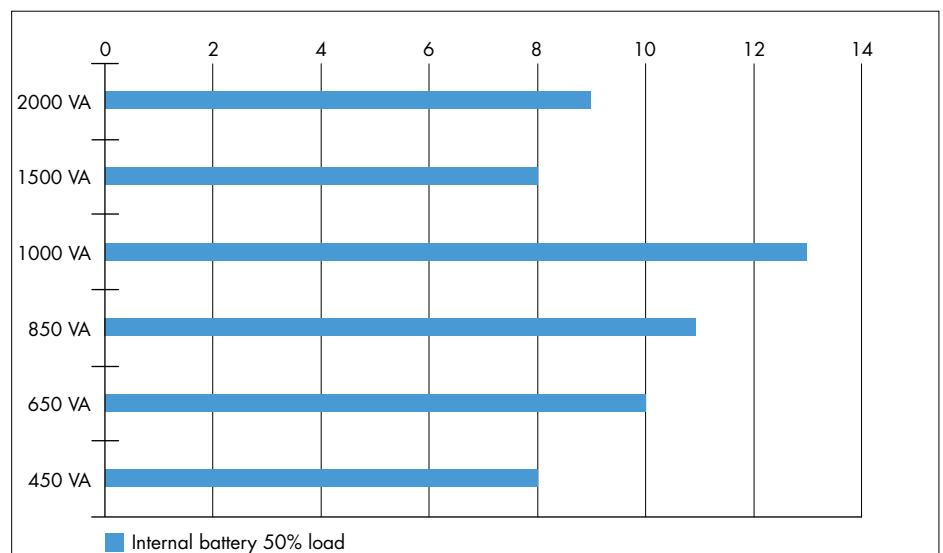

GIOTTO technical data

Rating (VA)	450	650	850	1000	1500	2000
Nominal power (W)	270	380	500	600	900	1200
UPS dimensions WxDxH (mm)	100x292x140			148x315x198		
UPS weight (kg)	4	5	5.5	9	10.5	11.8

Input

Connection type	IEC 320-C14
Nominal voltage	230 Vac 1-phase
Voltage range	160 to 290 Vac
Frequency and range	50/60 Hz, 45 to 65 Hz

Output

Connection type	1 IEC 320-C13 and 1 Schuko	4 IEC 320-C13 and 1 Schuko
Nominal voltage	230 Vac 1-phase	
Frequency	50/60 Hz	
Waveform	Simulated sine wave	

Battery

Autonomy time (min) ♦	50% load	8	10	11	13	8	9
	100% load	3	3	3	3	3	3

Connectivity and function extensions

Front panel	LCD, ON/OFF button
Communication	Included: USB. Compatible platforms: Windows, Linux, Mac

Environmental

Operating temperature range	0°C to +40°C
Altitude (AMSL)	< 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m
Audible noise at 1m (dBA)	<40

Standards and certifications

Quality assurance, environment, health and safety	ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007
Safety	IEC/EN 62040-1
EMC	IEC/EN 62040-2
Marking	CE

♦ Measurement conditions: optimized parameters, fully charged battery, 0.6 PF



GALILEO

1-Ph from 1000 to 3000 VA

On-line UPS
for networks and servers




Features and benefits

- On-line double conversion UPS from 1000 to 3000 VA, Tower and 2U Rack/Tower from three to six output receptacles (IEC 320-C13) and one or two Schuko.
- Rack/Tower convertible design to protect your investment when migrating from tower to rack-mount environment. Both UPS and display panel can be rotated.
- Easy installation and set up, user-replaceable and upgradable battery.
- Intuitive LCD display providing easy-to-read UPS status and power information.
- Audible alarm alerts upon utility power and UPS status change.
- Smart cooling system ensuring further energy savings.
- Programmable switched outlet group for setting load priorities.




- Active harmonic power quality control ensuring up to 0.99 input PF and THDi<3% for maximum compatibility with sources.
- Automatic self test and advanced battery management maximizing battery performance and extending battery life.
- Battery extension box allowing additional autonomy time to be quickly added.
- Remote power off for immediate UPS shutdown in case of emergency.
- USB communication port providing UPS management.
- One slot auto-sensing communication cards.
- Cold start for powering loads when mains are not available.
- Borri Power Guardian user-friendly UPS management software with alerts upon main power failures and system shutdown notification via SMS and email, free downloadable at www.borri.it/download.

Autonomy time in minutes for Rack/Tower UPS

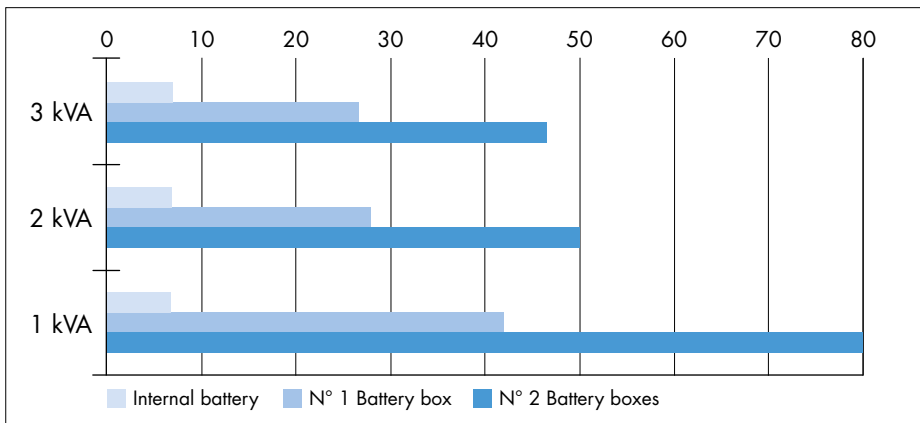

Autonomy time in minutes for Tower UPS

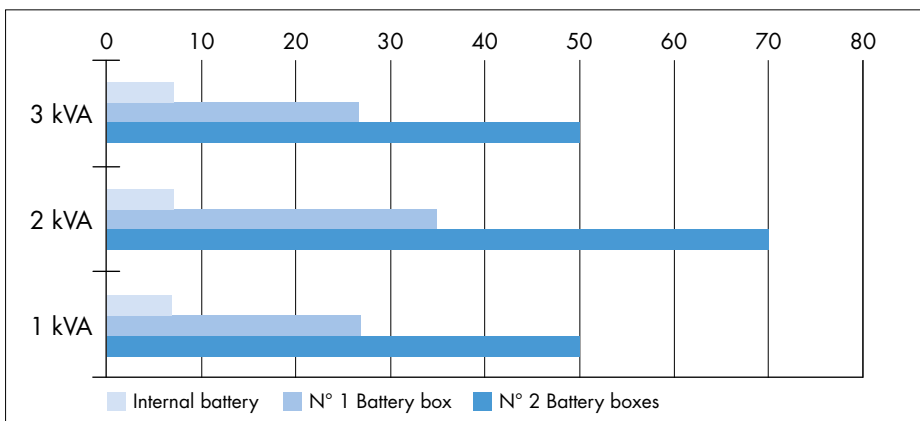

Main options

- SNMP card to send UPS status to BMS's by Ethernet connection and SNMP or ModBus over IP protocol to monitor UPS status by any internet browser from workstations and to receive SMS or e-mail alerts from the UPS on any portable device.
- Contact relay card to send UPS status to PLC's, SCADA's or AS400's by voltage free SPDT contacts.
- Additional battery charger for external battery box.
- Rail kit Rack/Tower.
- Rack PDU with external sockets and manual bypass switch.



GALILEO technical data

UPS Type	T *	T *	T *	RT (2U)**	RT (2U)**	RT (2U)**
Rating (VA)	1000	2000	3000	1000	2000	3000
Nominal power (W)	900	1800	2700	900	1800	2700
UPS dimensions WxDxH (mm)	144x367x236	151x444x322	189x444x322	440x390x88	440x475x88	440x600x88
UPS weight (kg)	11.2	18.8	24.9	12.0	17.0	26.5

Input

Connection type	IEC 320-C14	IEC 320-C20	IEC 320-C14	IEC 320-C20
Nominal voltage	230 Vac 1-phase			
Voltage range	195 to 260 Vac			
Frequency and range	50/60 Hz, 45 to 65 Hz			
Power factor	0.98		0.99	
Current distortion (THDi)	<3%			

Output

Connection type	3 IEC 320-C13 1 Schuko	3 IEC 320-C13 2 Schuko	6 IEC 320-C13 2 Schuko	3 IEC 320-C13	6 IEC 320-C13
Nominal voltage	230 Vac +/-1% 1-phase				
Frequency	50/60 Hz				
Power factor	Any power factor up to 0.9 lagging or leading without power derating				
Overload capability	105% continuous, 120% for 30 seconds, 150% for 10 seconds, >150% transfer to bypass				
Mode of operation	On-line, Eco mode				

Battery

Autonomy time internal battery (min)◆	50% load	12	13	15	12	13	15
	100% load	6	6	6	6	6	6

Connectivity and function extensions

Front panel	Display LCD, status LED, function keys
Communication	Included: USB, EPO, RS232. Optional: dry contact card, SNMP card. Compatible platforms: Windows, Linux, Mac

Environmental

Operating temperature range	0°C to +40°C
Altitude (AMSL)	< 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m
Audible noise at 1m (dBA)	<50

Standards and certifications

Quality assurance, environment, health and safety	ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007
Safety	IEC/EN 62040-1
EMC	IEC/EN 62040-2
Marking	CE

*Tower **Rack/Tower ◆ Measurement conditions: optimized parameters, fully charged battery, 0.7 PF



LEONARDO

1-Ph from 6 to 10 kVA

On-line UPS
for networks and servers,
small data centres



Features and benefits


- On-line double conversion UPS from 6 to 10 kVA, Tower and 2U or 3U Rack/Tower.
- Parallel redundant configuration maximizing the availability.
- Rack/Tower convertible design to protect your investment when migrating from tower to rack-mount environment. Both UPS and display panel can be rotated.
- Easy installation and set up, user-replaceable and upgradable battery.
- Intuitive LCD display providing easy-to-read UPS status and power information.
- Audible alarm alerts upon utility power and UPS status change.
- Smart cooling system ensuring further energy savings.
- Active harmonic power quality control ensuring 0.99 input PF and THDi<3% for maximum compatibility with sources.
- Automatic self test and advanced battery management maximizing battery performance and extending battery life.
- Battery extension box allowing additional autonomy time to be quickly added.

- Remote emergency power off to guarantee your piece of mind in critical applications.
- Internal manual bypass for safe and easy maintenance.
- RS232 communication port providing UPS management.
- Two slots auto-sensing communication cards.
- Cold start for powering loads when mains are not available.
- Borri Power Guardian user-friendly UPS management software with alerts upon main power failures and system shutdown notification via SMS and email, free downloadable at www.borri.it/download.


Main options

- SNMP card to send UPS status to BMS's by Ethernet connection and SNMP or ModBus over IP protocol to monitor UPS status by any internet browser from workstations and to receive SMS or e-mail alerts from the UPS on any portable device.
- Contact relay card to send UPS status to PLC's, SCADA's or AS400's by voltage free SPDT contacts.
- Additional battery charger for external battery box.
- Parallel kit.
- Rail kit Rack/Tower.
- Rack PDU with external sockets and manual bypass switch.

Autonomy time in minutes for Rack/Tower UPS

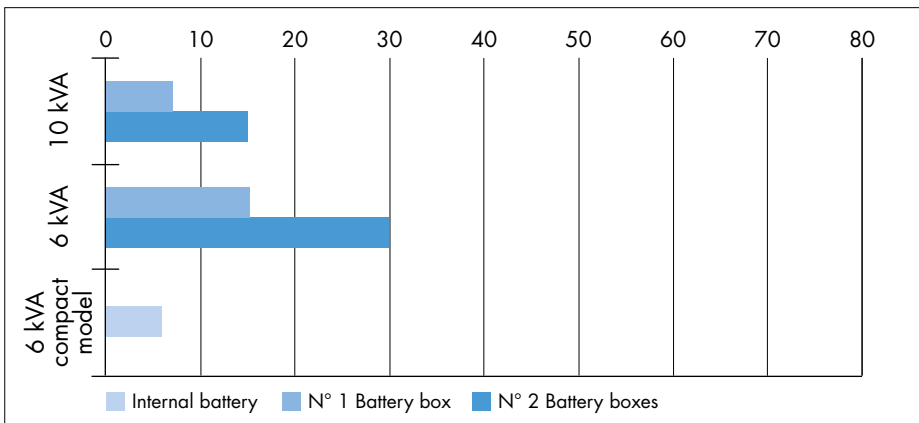

Autonomy time in minutes for Tower UPS

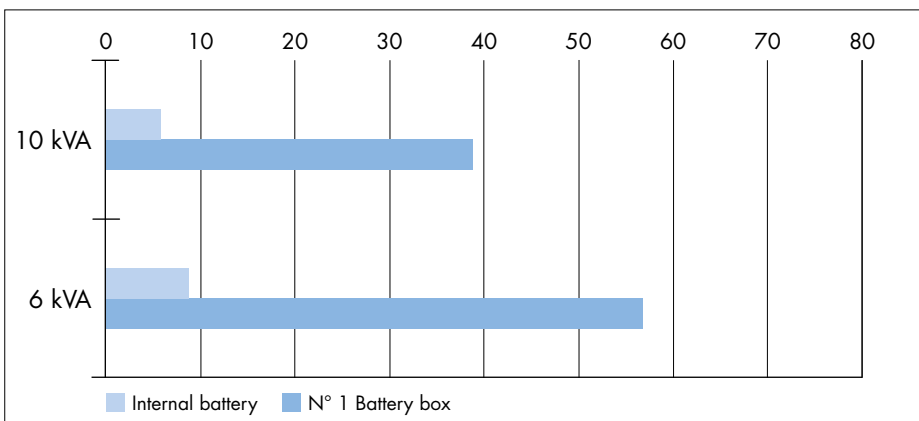

LEONARDO technical data

UPS Type	T *	T *	RT (2U)***	RT (4U)**	RT (3U)***
Rating (kVA)	6	10	6	6	10
Nominal power (kW)	5.4	9	5.4	5.4	9
UPS dimensions WxDxH (mm)	290x645x748	290x645x748	440x680x88	440x680x176	440x680x132
UPS weight (kg)	86	96	24	52	26

Input

Connection type	Hardwired 2w (rectifier), 2w (bypass)	Hardwired 2w
Nominal voltage	230 Vac 1-phase	
Voltage range	160 to 280 Vac	
Frequency and range	50/60 Hz, 45 to 65 Hz	
Power factor	0.99	
Current distortion (THDi)	<6%	

Output

Connection type	Hardwired 2w	
Nominal voltage	230 Vac +/- 1% 1-phase	
Frequency	50/60 Hz	
Power factor	Any power factor up to 0.9 lagging or leading without power derating	
Overload capability	104% continuous, 150% for 160 seconds, >150% transfer to bypass	
Mode of operation	On-line, Eco-mode	

Battery

Autonomy with internal battery (min)◆	50% load	25	17	external battery	15	external battery
	100% load	9	6	external battery	6	external battery

Connectivity and function extensions

Front panel	Display LCD, status LED, function keys
Communication	Included: RS232 card, EPO. Optional: dry contact card, SNMP card, RS485 card. Compatible platforms: Windows, Linux, Mac

Environmental

Operating temperature range	0°C to +40°C
Altitude (AMSL)	< 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m
Audible noise at 1m (dBA)	<50

Standards and certifications

Quality assurance, Environment, Health and Safety	ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007
Safety	IEC/EN 62040-1
EMC	IEC/EN 62040-2
Marking	CE

*Tower with internal battery **Rack/Tower with internal battery ***Rack/Tower without internal battery ◆ Measurement conditions: optimized parameters, fully charged battery, 0.7 PF



LEONARDO T 6/10 kVA



LEONARDO RT(4U) 6 kVA



LEONARDO RT(2U) 6 kVA



LEONARDO RT(3U) 10 kVA